




# USER MANUAL

## R50 SEEKER

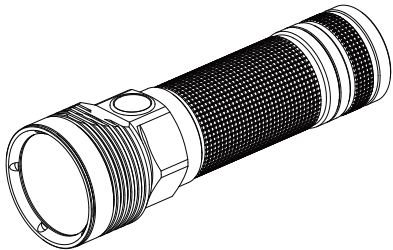

### INSIDE THE BOX

R50 Seeker, Lanyard, USB Power, Micro-USB Cable, User Manual

### SPECIFICATIONS

Material: Aircraft-grade aluminum body with anti-scratch type-III hard anodizing

297 m	MAX 2500 lumens	22,000cd	IPX8
1 m	Cree XHP50 CW	1 x 26650 (customized)	
10 Hz	(L)133 x (D)42 mm	255g (including battery)	

### OUTPUT & RUNTIME

<b>TURBO</b>	(2500 ~ 800 lumens)	*2 mins + 150 mins
<b>HIGH</b>	(1200 ~ 800 lumens)	*12 mins + 130 mins
<b>MEDIUM</b>	(300 lumens)	6 hours
<b>LOW</b>	(50 lumens)	50 hours


\* Stated data on Turbo and High mode has been measured indoor under 25 degrees Celsius, windshield laboratory conditions. The data may vary due to environmental and heat dissipation conditions.

### BATTERY INSTALLATION

Ensure battery is inserted with the positive (+) end pointing to the head. The flashlight will not operate with incorrectly inserted battery.

### SUPPORTED BATTERY

- 1 x 26650 (included)

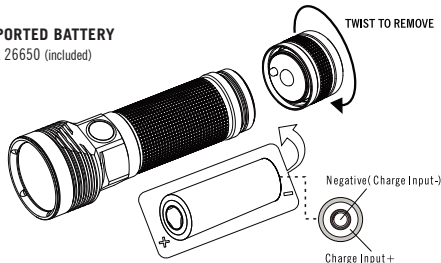

### ( EN ) English

**TURN ON/OFF:** Before use, please tighten the tail-cap to close the circuit loop, click the side switch to turn flashlight on or off.

**CHANGING BRIGHTNESS LEVEL:** With the light on, press and hold the side switch to change the brightness level. The output will circle up then repeats low – medium – high until the switch is released.

**TURBO & STROBE:** To access the turbo mode, double click the side switch. To access the strobe mode, Triple click the side switch.

**Memorized:** The flashlight always turns on at the last memorized brightness mode. The high mode will be memorized for only 10 minutes after the light turns off, the memorized high mode will change to medium mode 10 minutes later.

**LOCK OUT:** With the light off, press and hold the side switch for more than 1 second, the light will turn on at low mode, keep holding the side switch 2 seconds more, the light will be locked out.

**UNLOCK:** Hold the side switch for approximately 3 seconds, the light will be automatically unlocked and output on low mode.

**CHARGING:** Connect the light to a USB power supply with the included USB cable, the red LED indicates the charging is in progress, green indicates charging completed.

### WARRANTY

**Within 30 days of purchase:** Return to the retailer which you purchased from for repair or replacement,

**Within 5 years of purchase:** Return to Olight for repair or replacement.

Note: Excluding batteries, battery pack, accessories and other products which warranty period had been declared.

This warranty does not cover normal wear and tear, modifications, misuse, disintegrations, negligence, accidents, improper maintenance, or repair by anyone other than an authorized retailer or Olight itself,

**Technical Support Inquiries:** techsupport@olightworld.us

**Customer Service:** cs@olightworld.us

Visit [www.olightworld.com](http://www.olightworld.com) to see our complete product line of portable illumination tools.

### DANGER

Do not turn the light directly into human eyes. This may cause blindness for seconds or hurt the eyes.

### WARNING

- Do not use the turbo mode continuously when the environmental temperature is high in case the flashlight body is too hot to hold.

- If the light is about to be put aside for a long time or be transported, please unscrew the tail cap lightly to cut off the circuit of electricity.

## BRIGHTGUY IS AN AUTHORIZED OLIGHT DISTRIBUTOR



Olight Technology Co., Limited

Address: 2/F, Building A, B3 Block, Fuhai Industrial Park, Fuyong, Bao'an District, Shenzhen, China 518103

V1. 05. 07, 2016



MADE IN CHINA