



**SIDESLIDE SERIES  
OPERATING INSTRUCTIONS**

940K-010FI  
940K-010RSC  
940K-01PIC

C-Clamp  
Bolt  
Picatinny



C-Clamp

Bolt

Picatinny

Please read the below before using your SideSlide as it relays beneficial operating and safety information.

**PHYSICAL CHARACTERISTICS:**



*Flashlight:*

Dimensions:	5.5" long x 1.3" square head side x 1.1" diameter handle (140 x 32 x 28mm)
Weight:	4.7 oz (133g)

Unique SideSlide lock holds flashlight securely within specific adaptor:

*C-Clamp Mount:*

Dimensions:	1.5" x 2.8" x 1.6" (37 x 70 x 40mm)
Weight:	3.7 oz (105g)

*Bolt Mount:*

Dimensions:	1.5" x 2.0" x 2.4" (37 x 51 x 61mm)
Weight:	2.9 oz (82g)

*Picatinny Mount:*


Dimensions:	1.7" x 1.7" x 2.2" (43 x 43 x 56mm)
Weight:	3.9 oz (111g)

**BATTERIES:**

- The SideSlide Series models require two (2) CR123 batteries or one (1) 18650 batteries.
- Mixing of used and new, or different brand batteries is not recommended as this could lead to leakage or explosion.

**BATTERY INSTALLATION/REPLACEMENT**

1. Each flashlight consists of: Head, Handle and End Cap.
2. To install batteries, first remove the End Cap at the rear of the Main Body.
3. Insert required batteries following the direction of the icon that is located on the End Cap. Respect appropriate polarity when installing. Replace the End Cap securely.
4. Test the light's performance by activating the ON-OFF push button Switch, located at the rear of the End Cap.



**BATTERY LIFE**

Battery Life is expected as follows, according to light intensity selected:

	940K-010FI & 940K-010RSC	940K-010PIC
<b>HIGH POWER</b>	4 hrs	75 minutes
<b>LOW POWER</b>	10 hrs	10 hrs
<b>BLINKER</b>	8 hrs	4 hrs

\*Battery life may vary according to Mode selected, Battery Quality, and prevailing Ambient Conditions.

**OPERATIONAL MODES:**

- Press ON/OFF for High mode
- Press and Hold switch (2.0-2.5 seconds) for Low and Blinker (2/second) modes

**NOTE:**

- The light does not retain the mode in memory. Once you turn the SideSlide On, you will have to re-select anew which mode you prefer/need.
- When ON in any mode, a rear green warning light will be flashing (excluding picatinny model).



**INSTALLATION OF YOUR SIDESLIDE ON A HELMET:**

The supplied adaptor mounts or clamps to a helmet. Flashlight is easily securable & removable by the unique SideSlide locking arm.

*Insert Flashlight into Mount:*



Install & Re-Install flashlight by simply pushing it into the adaptor opening until it clicks.

- Once in, the locking arm will simply fall into a handle groove, preventing the flashlight from coming off the mount.

*Remove Flashlight from Mount:*

- Continuously press down on the locking arm while meanwhile pulling the flashlight straight out of the adaptor.



**SIDESLIDE C-CLAMP**

Place adaptor around helmet at desired location and tighten screws.



NOTE: There are two screws which allow you to separate the clamp from the adaptor, and flip it 180°, so that it can be worn on either side of the helmet.

**SIDESLIDE BOLT**

Mount will rotate, to provide light at different vertical angles.



**SIDESLIDE PICATINNY**


Mounts on rifle and shotgun with picatinny rail via screw locking mount.



*Optional:* Pressure switch cap (with 23.6 inch | 600 mm cable) available P/N 50-150



## **PRODUCT DURABILITY, ENVIRONMENTAL CONSTRAINTS & CERTIFICATIONS:**

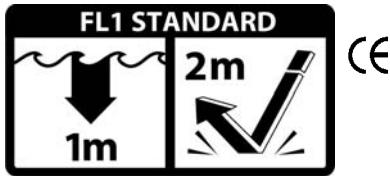

- Meets NFPA 1971-2007 Fire Resistant Requirements:  
500°F / 260°C for 30 minutes

### **REFLECTIVE STICKER:** P/N 940K-010FI & 940K-010RSC *Only*

For your safety, and increased visibility, a reflective sticker (enclosed in box) may be placed on the side of the SideSlide.

### **CARE/CLEANING:**

Your FoxFury is a professional tool, but regular maintenance and care of your light will maximize performance for you. As needed, wash your FoxFury using a soft washcloth, clean water and a mild soap. Be sure that the flashlight's end cap is SEALED before washing. When done, pat dry with a damp cloth.

### **BATTERY PACK MAINTENANCE:**

#### **DEALING WITH CORROSION FROM LEAKING BATTERIES**

Battery leakage may cause "corrosion" to build in the battery pack connection plates, causing light not to function properly.

In case of presence of Corrosion in the battery pack connection plates, please follow the suggested steps listed below:

1. Mix 50% vinegar and 50% water.
2. Remove batteries from the battery pack.
3. Pour the combination into the battery pack and let soak for 5 minutes.
4. Remove fluid from inside the battery pack and dry it properly with a paper towel, and a blow drier on Medium or Low heat setting held at least 6" away (make sure no liquid residue is left inside battery pack).
5. Replace your batteries and test the light's function.
6. If any scrubbing action is required, a moistened vitamin C tablet can be used on the flat contact areas. Rinse well and dry as noted above.
7. Repeat as needed.

NOTE: Corrosion from leaking batteries is not considered a warranty issue.

### **AVAILABLE ACCESSORIES:**

- *C-Clamp Adaptor, P/N 85-010*
- *Bolt Adaptor, P/N 85-011*
- *Picatinny Adaptor, P/N 85-012*
- *Flashlight for C-Clamp & Bolt, P/N 940-010FI*
- *Flashlight for Picatinny, P/N 940-012*
- *Pressure Switch Cap (Picatinny Only), P/N 50-150*

### **WARNINGS:**

#### **IMPORTANT**

FoxFury, LLC is not responsible for the incorrect use of any FoxFury Lighting product.

- Lights are strong enough to cause damage to the human eye.
- Do not stare into LEDs for long periods of time or from a close range (less than 2 feet).
- FoxFury, LLC is not responsible for any injury or damage caused during the use of this product.
- Usage of this product must be supervised by an adult when it is being used by a minor.
- Any FoxFury product should be operated at speeds safe enough to maneuver around surrounding obstacles.
- Do not use under the influence of drugs or alcohol.

## **LIMITED WARRANTY**

### **FoxFury Limited Warranty & Customer Care Information**

FoxFury, LLC ("FoxFury") warrants to the purchaser of this product ("Buyer") that for a period of two years following purchase, this product will be free from defects in material and workmanship and will function in substantial compliance with FoxFury's written specifications for this product as specified in the instruction manual or on FoxFury's website located at [www.foxfury.com](http://www.foxfury.com). Buyer's exclusive remedy shall, in any case, be limited, at FoxFury's election, to: A) repair or replacement of the defective product; or B) refund of the purchase price for this product. THE FOREGOING WARRANTY IS THE ONLY WARRANTY MADE BY FOXFURY WITH RESPECT TO THIS PRODUCT. TO THE EXTENT ALLOWED BY APPLICABLE LAW, THERE ARE NO REPRESENTATIONS OR WARRANTIES OF ANY KIND BY THE FOXFURY, EXPRESS OR IMPLIED, WITH RESPECT TO THE CONDITION OR PERFORMANCE OF THIS PRODUCT, INCLUDING, BUT NOT LIMITED TO, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. **This limited warranty shall not apply if this product is not stored, handled, installed or used in strict accordance with manufacturer's specifications and instruction manuals, or which has been subject to misuse, alteration, negligence or accident.**

1. The damaged part or product must be returned to FoxFury **PRIOR TO** any repair or replacement. Shipping costs are the responsibility of the claimant.
2. You must obtain a return authorization (RMA) number from FoxFury prior to returning products. FoxFury is not responsible for any damage incurred while in transit.
3. Buyer will be required to show proof of purchase – No Exceptions.
4. Any modifications to light, cable or battery pack automatically voids all warranties on this product.

All warranty inquiries should be directed to FoxFury's Customer Service Department to handle all warranty/repair-related inquiries.

**TO THE EXTENT ALLOWED BY APPLICABLE LAW: (A) IN NO EVENT, WHETHER DUE TO BREACH OF WARRANTY HEREUNDER OR ANY OTHER CAUSE WHATSOEVER, SHALL FOXFURY BE LIABLE FOR OR OBLIGATED IN ANY MANNER TO PAY CONSEQUENTIAL, INCIDENTAL OR INDIRECT DAMAGES, INCLUDING, BUT NOT LIMITED TO, LOSS OF PROFITS, COST OF SUBSTITUTE PRODUCTS AND PERSONAL INJURY OR PROPERTY DAMAGE, WHETHER SUCH CLAIM IS BASED ON CONTRACT OR TORT OR ANY OTHER THEORY OF LAW, AND (B) FOXFURY'S ONLY DUTIES IN CONNECTION WITH THE SALE OF THIS PRODUCT SHALL BE TO HONOR THE LIMITED WARRANTY SET FORTH HEREIN. TO THE EXTENT THAT THIS LIMITED WARRANTY IS INCONSISTENT WITH APPLICABLE LAW, THIS STATEMENT SHALL BE DEEMED MODIFIED TO BE CONSISTENT WITH SUCH APPLICABLE LAW.**



FoxFury, LLC  
Vista, CA 92084 USA  
Toll-Free: 844-FOXFURY  
Tel: 760.945.4231  
Fax: 760.758.6283  
Email: [custserv@foxfury.com](mailto:custserv@foxfury.com)  
[www.FoxFury.com](http://www.FoxFury.com)

All FoxFury products are designed in Vista, CA. All FoxFury products are manufactured with the highest quality USA and foreign parts. Products are assembled in either FoxFury's controlled plant in Asia or the USA, under strict quality control.