

# Streamlight p/n 69901 12 Gauge Mag Tube Mount Installation Guide

For TLR-1, TLR-2, AND M3, M6, M3X, AND M6X

**MAKE SURE THAT THE FIREARM IS UNLOADED AND THE BREECH IS OPEN. IT IS IMPERATIVE THAT SAFETY MEASURES BE EMPLOYED AT ALL TIMES.**

1. Place the firearm onto a flat surface with the muzzle pointing away from you and in a completely safe direction.
2. Place the opening of the Mag Tube Mount over the magazine tube and slide it downward to the desired mounting location. (Do not apply hardware at this time.)  
It may be necessary to insert a flat blade screwdriver into the flat jaws of the adapter to widen the opening.



*Remove the barrel assembly of the Mossberg 500 and similar weapons.*

- a. *Unscrew the take down screw from the magazine tube.*
- b. *Pull the barrel directly out of the receiver.*
- c. *Place the round opening of the Mag Tube Rail Mount over the magazine tube and slide it to the desired position.*
- d. *Secure the mount as described below and then reattach the barrel.*

3. Place three of the supplied socket head cap screws (choose proper length-see note below) into the holes in the side of the Mag Tube Mount and loosely attach the nuts.  
Note: The socket head screws and nuts can be mounted on either side of the mount but the nuts should be oriented towards the barrel to allow for proper tightening.  
Note: Check the distance between the ends of the socket screws and the barrel to avoid damaging the weapon's finish.

4. Rotate the Mag Tube Mount to the desired orientation and tighten the mounting screws.  
Note: Tighten the screws in small increments and alternate front to rear.  
**Do not over tighten** the screws as they can damage the plastic adapter.

5. Recheck the tightness of all of the mounting screws frequently for several days.

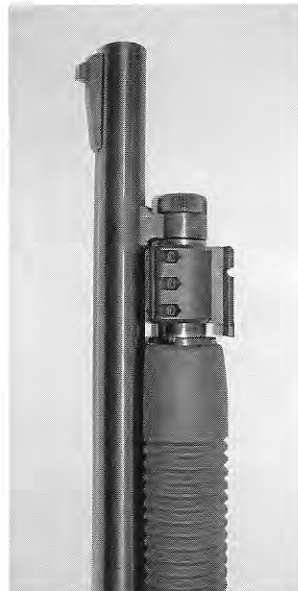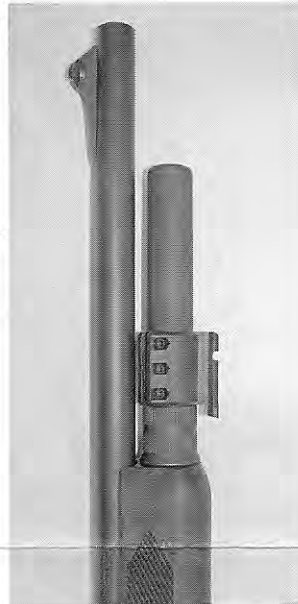

p/n 990486  
Rev.B 04/07