

**Congratulations on the purchase of your UnderwaterKinetics all environment work light! The chemically resistant 4AA eLED is supported with a complete line of accessories to help you work more safely and efficiently in normal and wet environments.**

### TECHNICAL DATA

**Batteries:** 4x Alkaline AA /LR6/mignon or Energizer AA Ultimate Lithium batteries

**Lamp type:** High-Intensity LED

**Size:** 6.30 in x 1.60 in x 1.40 in;

16.00 cm x 4.06 cm x 3.56 cm

**Weight:** 5.60 oz 158.76 g

**Materials:** Polypropylene, nylon, polycarbonate, copper alloys, stainless steel

**Immersion depth:** 10 feet / 3 m

**Enclosure chemical resistance\*:**

acetone, battery acid, brake fluid, diesel fuel, ethanol, coolant, gasoline, grease, hydrochloric acid, hydraulic fluid, methyl ethyl ketone


*\*Brief exposure only*

### US - Limited Lifetime Warranty

Underwater Kinetics products are engineered for maximum performance and durability. All products carry a Limited Lifetime Warranty to the original retail purchaser to be free from defective material and workmanship under normal and intended use. In addition, the Underwater Kinetics Limited Warranty covers materials used in its products to the original purchaser, from the date of purchase, as follows: plastics for 10 years; rubber for 3 years, LED and electronics for 3 years, lithium ion battery for 90 days

In the event the original retail purchaser detects a defect in the material or workmanship, the product along with proof of purchase date should be returned to an authorized Underwater Kinetics dealer or directly to Underwater Kinetics with the postage prepaid. Underwater Kinetics agrees to repair or replace at Underwater Kinetics' sole discretion any product found to be defective in material or workmanship within the time period specified above. For the complete Limited Lifetime Warranty write to Underwater Kinetics or go to the web site [www.underwaterkinetics.com](http://www.underwaterkinetics.com).

Address all correspondence and returns to:  
Underwater Kinetics  
13400 Danielson Street  
Poway, CA 92064  
tel: (858) 513-9100 fax: (858) 513-9111  
email: [info@uwkinetics.com](mailto:info@uwkinetics.com)  
web: [www.uwkinetics.com](http://www.uwkinetics.com)

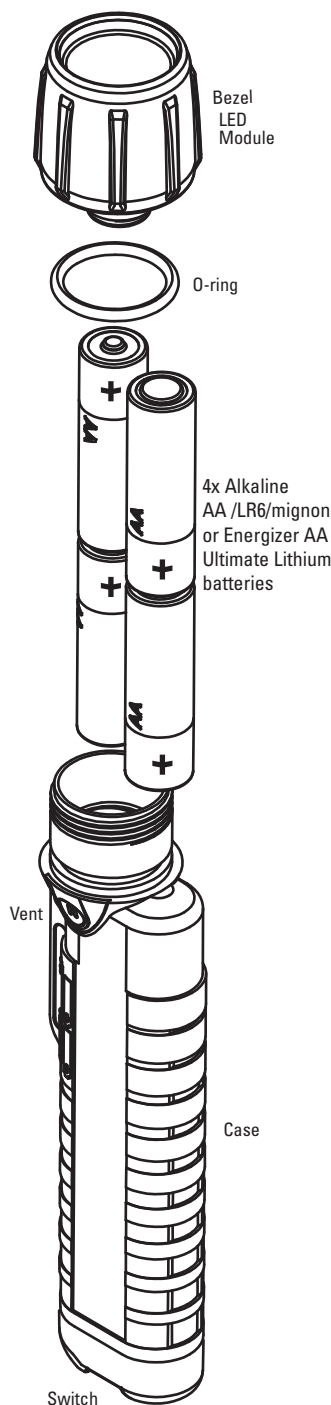

**Model:UK4AA eLED-NC**

PN: 402275

## OPERATING INSTRUCTIONS AND IMPORTANT INFORMATION

### Battery Installation

To install batteries, hold the case in the position shown. (1) Drop two batteries with the positive + end down into the case. (2) Then drop two batteries with positive + end facing up into the case. Place the Bezel / LED Module over the mouth of the light and twist it onto the case.

*Note: The flashlight will not light if the batteries are inserted improperly.*

### CAUTION

Batteries can vent hydrogen gas and possibly cause an explosion (1) if they are installed without the proper polarity, (2) if they are not the same type, brand name and age or (3) if they are completely discharged.

- Load batteries according to the diagram
- Discard all batteries as soon as they are drained or no longer produce light.
- Do not mix batteries of different type, brand or age

### ON/OFF

To operate the UK 4AA eLED push in on the black rubber switch to turn the light on and off. Make sure the bezel is screwed all the way down or the UK 4AA eLED will not turn on. By partially unscrewing the bezel you can protect the light from turning on by accident.

### O-Ring Seal

The O-ring and threads must always be kept clean. Lightly lubricate the O-ring which seals the rubber covered bezel and case with silicone grease.

### Pressure Equalizing Vent

Air and gas from battery leakage can pass freely in and out of the UK 4AA eLED through a vent in the rear of the light. Do not allow dirt or grease to accumulate on the vent or it will not operate properly.

### Care and Maintenance

- Keep area around the O-ring clean.
- If the light floods, empty it immediately, rinse with fresh water and dry completely before assembly
- Do not store batteries in the light for long periods of time when not in use; they may leak and damage the light.